


JJ-2132M-SS

(A 2275)

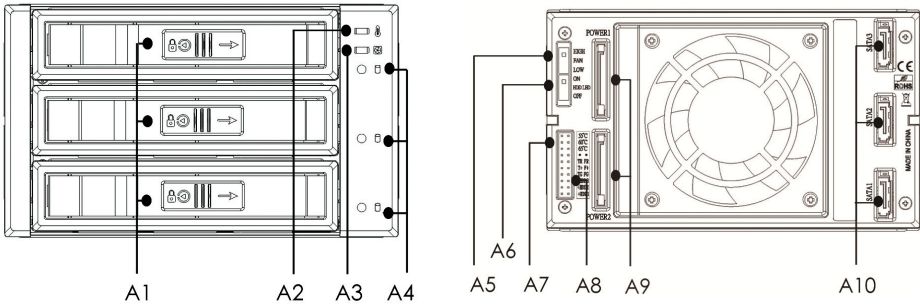

- A1 = Triangle Safety lock
- A2 = Temperature status LED
(Normal : Green & Failed : Red)
- A3 = FAN status LED
(Normal : Green & Failed : Red)
- A4 = HDD power & access LED
- A5 = FAN Speed switch
High (3000rpm)/Low (2400rpm)

- A6 = HDD LED Switch (enable/disable)
- A7 = Temperature setting jumper
(55°C/60°C/65°C)
- A8 = External signal pin slot
- A9 = 15pin Power connector x 2
- A10 = SATA data signal connector x 3

LED	A4		
State	HDD in	HDD Access	A6 turn OFF
Color	Green	Orange	Green
Blink	x	o	x

* When A6 switch is turned to OFF position, the HDD accessing function is disabled. In this case, the front accessing LED is displayed in solid green only and that means it is with the power ON function only, but without blinking accessing signal.



- **Material: Aluminum Frame & bezel**
- **With aluminum HDD tray**
- **Interface: Support SATA-I, II, III & SAS I, II**
- **Transfer rate: Up to 6Gbps**
- **Connector: 15pin SATA-power connector x 2 & 7pin data signal connectors x 3**

- **Black aluminum-body with Black panel**
- **Sides sliding rails with vibration reducing springs**
- **Triangle metal key-lock safeguards the hard disk in the correct position preventing it bouncing out while HDD is in operation**
- **Support SATA and SAS primary channel**
- **Hot swap in / out**
- **2 * 5.25" Bay for 3 * 3.5" (or 2.5") SATA or SAS Hard drives**
- **HDD LED functioning ON/OFF Switch**
- **Switch for cooling fan (High or Low speed)**

- **Dim: 207(L) * 146(W) * 86(H) mm**
- **Weight: 1.33 kgs**
- **Color: black**
- **Fan: 7cm FAN x 1**