


JJ-47SS

(A 2557)

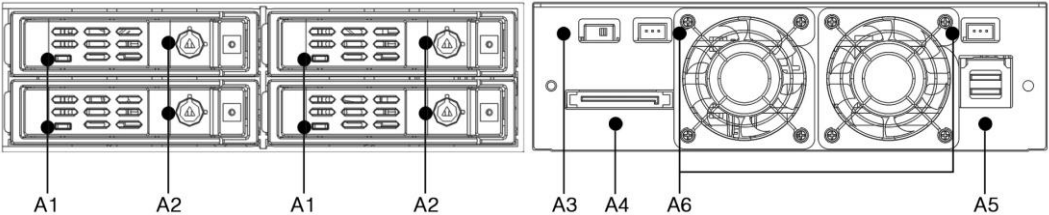

- A1 = HDD power & access LED
- A2 = Triangle Safety lock
- A3 = HDD LED Switch (enable/disable)

- A4 = 15pin Power connector x 1
- A5 = mini SAS SFF-8643 x 1
- A6 = 3pin jumper for cooling fan

LED		A1			
State	HDD in	HDD Access	A3 turn OFF	Overheating	Fan failure
Color	Blue	Purple	Blue	Red	Red
Blink	x	o	x	o(fast)	o(slow)

* When A3 switch is turned to OFF position, the HDD accessing function is disable. In this case, the front accessing LED is displayed in solid blue only and that means it is with the power ON function only but without blinking accessing signal.



- Material: Aluminum Body & Carrier
- Interface: Support SAS 12G & SAS II/I, SATA III/II/I.
- Transfer rate: Up to 12Gbps
- Connector: 15pin SATA-power connector x 1 & mini SAS SFF-8643 x 1

-
- Black aluminum-body with Black panel
 - Sides sliding rails with vibration reducing springs
 - Triangle metal key-lock safeguards the hard disk in the correct position preventing it from bouncing out while HDD is in operation.
 - Hot swap in / out
 - 1 * 5.25 Bay for 4 * 2.5"SATA or SAS Hard drives (HDD height up to 15mm)
 - HDD LED functioning ON/OFF Switch

-
- Color: Black
 - Fan: 4cm FAN X 2
 - Dim: 202* 146 * 42 mm
 - Weight: 0.95 kgs

Note: Don't tilt the tray when inserting it!!

